



DIRECT WIRE DIMMABLE and NON-DIMMABLE UNDERCABINET LIGHTING SPECIFICATION SHEET - 120V LED

Project: _____

Fixture Type: _____

Location: _____

Contact Phone: _____

PRODUCT DESCRIPTION

LumenTask 120V LED undercabinet lighting fixtures with 3200K LED diodes and integrated LED power supply that delivers maximum light output along with 50,000 hour life. The unique housing features an Open Wide™ hinged system that affords hands-free maintenance. Also available with a dimming option. LumenTask is rapidly becoming the preferential undercabinet lighting system for residential lighting applications, and is now available in energy-saving LED.

PRODUCT SPECIFICATIONS

Housing Construction: One-piece, low profile (1-3/8" height) die-formed 18 gauge cold rolled steel housing with die cast end caps. Mounting holes with pre-affixed screws for easy alignment and installation. Multiple vents for cool undercabinet operation. White, bronze, powder coat paint and solid stainless steel finish.

Electrical: Wire mold knock-outs on end caps for through wiring wiring (utilizing LumenTask EZ Connectors) of multiple units. Hi-low-off switch. 50,000 hr. lamp life at 3000°K*.

Dimming: Available. Please specify -DIM as ordering suffix.

Diffuser: Tempered prismatic frosted glass lens that slides in for easy installation. Spring loaded retention clip holds lens securely in place.

Installation: Must be installed a minimum of 2" from back of cabinet to allow for proper ventilation.

Label: ETL listed.


OPEN WIDE FEATURE

Accessing the interior of LumenTask without dismounting is easy. Our Open Wide design keeps the fixture open and your hands free to wire. By simply pressing the wire compartment holding tab, the wiring compartment cover swings down and out, and stays in position until you're ready to snap it back in its closed position, and slide the lens back in place.

*Kelvin temp (color) ±200K

LUMEN OUTPUT


LED LumenTask	Low	High
8" LED LumenTask	101 lumens	189 lumens
16" LED LumenTask	163 lumens	300 lumens
24" LED LumenTask	232 lumens	428 lumens

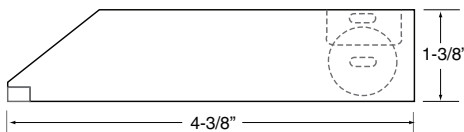

Tempered frosted, prismatic glass lens that slides in for easy installation.

Hi-Low-Off switch enables full or 50% lighting level (on/off switch in dimmable (DIM) models).

Integral LED power supply

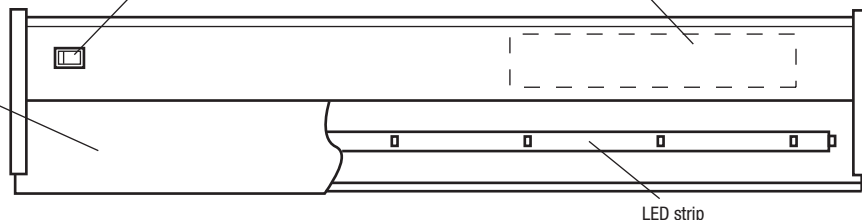

LED strip

PRODUCT SPECIFICATION NUMBERS

Catalog No.	Fixture Watts*	Dimming	No. of Diodes	Finish	Length
UCLED-8-WH	11W	No	3	White	8"
UCLED-8-BZ	11W	No	3	Bronze	8"
UCLED-8-SS	11W	No	3	Stainless Steel	8"
UCLED-16-WH	17W	No	5	White	16"
UCLED-16-BZ	17W	No	5	Bronze	16"
UCLED-16-SS	17W	No	5	Stainless Steel	16"
UCLED-24-WH	24W	No	8	White	24"
UCLED-24-BZ	24W	No	8	Bronze	24"
UCLED-24-SS	24W	No	8	Stainless Steel	24"
UCLED-8-WH-DIM	11W	Yes	3	White	8"
UCLED-8-BZ-DIM	11W	Yes	3	Bronze	8"
UCLED-8-SS-DIM	11W	Yes	3	Stainless Steel	8"
UCLED-16-WH-DIM	17W	Yes	5	White	16"
UCLED-16-BZ-DIM	17W	Yes	5	Bronze	16"
UCLED-16-SS-DIM	17W	Yes	5	Stainless Steel	16"
UCLED-24-WH-DIM	24W	Yes	8	White	24"
UCLED-24-BZ-DIM	24W	Yes	8	Bronze	24"
UCLED-24-SS-DIM	24W	Yes	8	Stainless Steel	24"

*Total wattage includes power supply

ACCESSORIES

Catalog No.	Description
EZ-1	EZ connector (connects two fixtures)
EZ-3	3" interconnect modular cable
EZ-6	6" interconnect modular cable
EZ-12	12" interconnect modular cable
EZ-18	18" interconnect modular cable
JB-1	Junction box - 4 knock-outs 4"L x 2"W x 1-5/8"H
CP-6	6' modular cord and plug for wall outlet
GL8	8" replacement lens for 8" models
GL16	16" replacement lens for 16" models
GL24	24" replacement lens for 24" models

NOTE: All EZ connectors are three wire.



9830 W. 190th Street • Unit F • Mokena, IL 60448 • www.gmlighting.net

Toll-Free: (866) 671-0811 FAX: (708) 478-2640

e-mail: gmlightingllc@sbcglobal.net • Specifications subject to change without notice. Patent pending ledlumentask_012913