

Features

- Die-cast housing with UV resistant powder coat finish
- Bronze finish
- Polycarbonate lens with UV stabilizers
- -40°F to 113°F ambient rating

Specs

- 120-277V
- 110 LPW (Lumens per watt)
- THD%: <20%
- Power Factor ≥ 0.9
- 80 CRI
- 50,000 Average rated life

Applications


- Parking lots, area lighting, illumination of areas of egress, security lighting




Model Number	SKU#	UPC Code	Cplor Temp	Input Power Watts	Lumens	Efficiency	Size(in)
--------------	------	----------	------------	-------------------	--------	------------	----------

WPA70U85	8013947	628398013947	5000K	70	7700	110	14.2X9.3X7.4
----------	---------	--------------	-------	----	------	-----	--------------


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

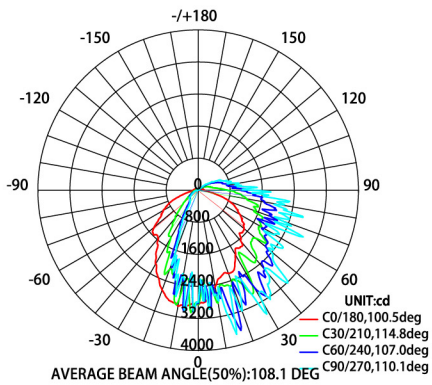

ISOCANDELA DIAGRAM

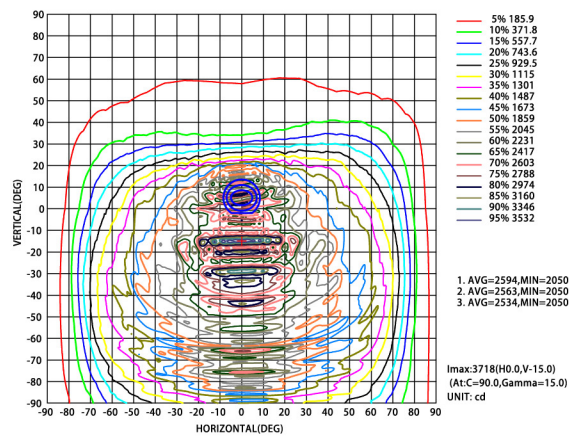

AAI Figure

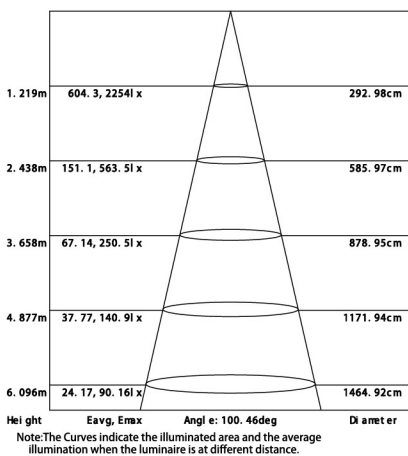

ISOLUX DIAGRAM

