

## Features

- Die-cast housing with UV resistant powder coat finish
- Bronze finish
- Polycarbonate lens with UV stabilizers
- 40°F to 113°F ambient rating

## Specs

- 120-277V
- 110 LPW (Lumens per watt)
- THD%: <20%
- Power Factor≥0.9
- 80 CRI
- 50,000 Average rated life


## Applications

- Parking lots, area lighting, illumination of areas of egress, security lighting




Model Number	SKU#	UPC Code	Cplor Temp	Input Power Watts	Lumens	Efficiency	Size(in)
WPB90U85	8013954	628398013954	5000K	90	9900	110	14.2X9.3X7.4


## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

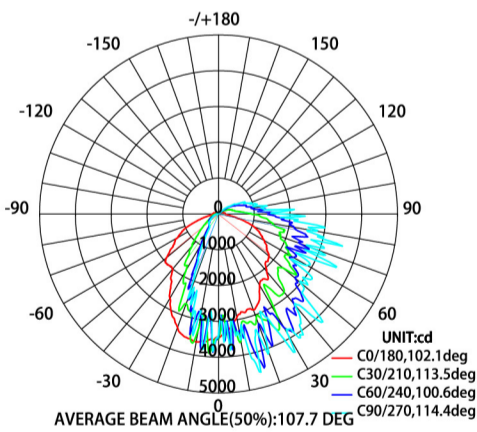

## ISOCANDELA DIAGRAM

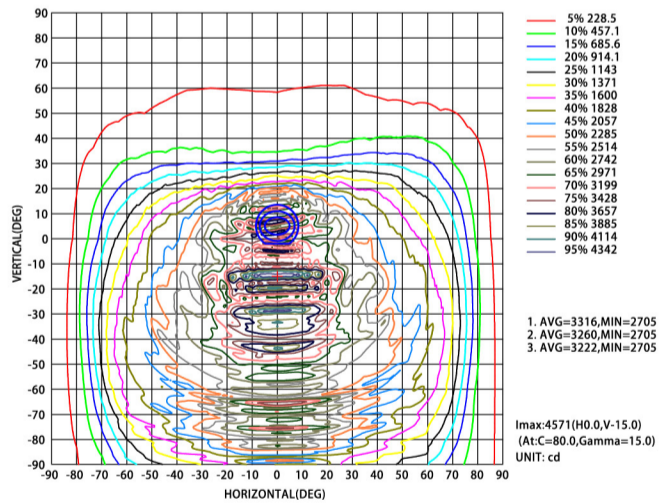

## AAI Figure

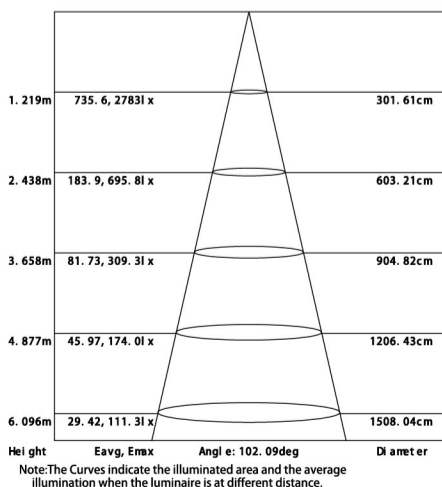

## ISOLUX DIAGRAM

