

CATALOG NO. _____

Crescent


TYPE NO. _____

JOB NAME _____

S-1


General Purpose Wraparound (NLT)

**NEW
3 LIGHT
WRAP**

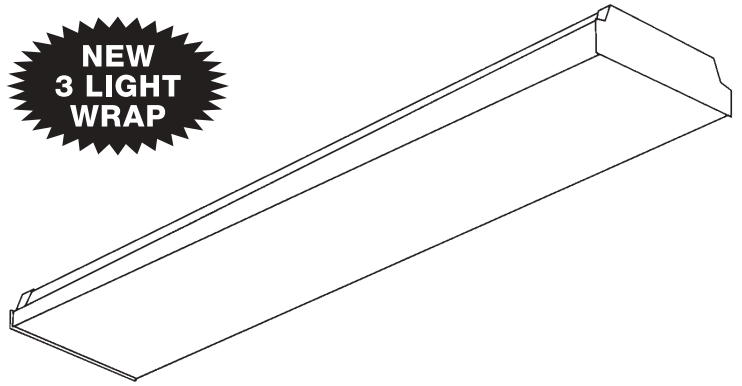

ORDERING INFORMATION

Catalog Number: Example: NLT2321K2Y

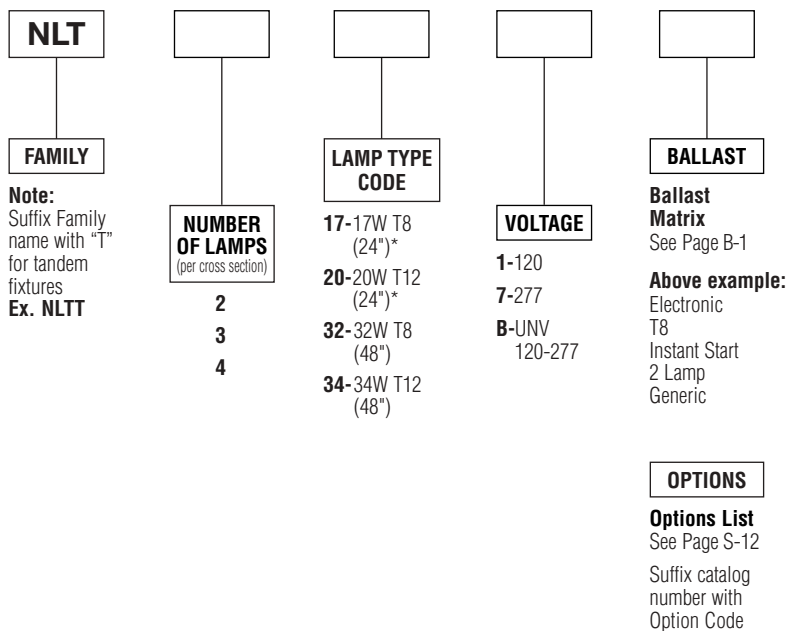

*2 light fixtures only. Not available in 3 or 4 light fixtures.

PRODUCT FEATURES

- Shallow profile and linear prismatic sides combine to reduce ceiling contrast.
- Acrylic shielding hinges along the unit's entire length for safety and ease of maintenance.
- Snap-on components provide simple, time-saving installation.
- Optional low-density mounting is available.
- Housing has 7/8" K.O. on each end for row mounting.


PRODUCT AVAILABILITY

FAMILY	NOMINAL SIZE	NUMBER OF LAMPS (per cross section)	NUMBER OF LAMPS (per fixture)	LAMP TYPE CODE	LENGTH	WIDTH	HEIGHT
NLT	2'	2	2	17, 20	24"	8 5/8"	2 13/16"
NLT	4'	2	2	32, 34	48"	8 5/8"	2 13/16"
		3	3	32, 34	48"	13 7/8"	2 7/8"
		4	4	32, 34	48"	13 7/8"	2 13/16"
NLTT	8'	2	4	32, 34	96"	8 5/8"	2 13/16"

S-1

General Purpose Wraparound (NLT)

Two-Lamp Photometric Data




Coefficients of Utilization

Floor Cavity Reflectance 0.20

Room Cavity Ratio	RC RW	80%			50%			10%		
		50	30	10	50	30	10	50	30	10
1	71	68	66	65	63	61	57	56	55	
2	63	59	55	58	54	52	51	49	47	
3	56	50	47	52	48	45	46	44	42	
4	50	44	40	46	43	39	41	39	37	
5	44	39	35	41	37	34	37	34	32	
6	40	34	30	37	33	30	33	30	28	
7	36	30	26	34	30	26	30	27	25	
8	32	27	23	31	26	23	27	24	22	
9	29	24	20	28	23	20	25	22	20	
10	26	22	18	26	21	18	23	20	18	

Four-Lamp Photometric Data



Coefficients of Utilization

Floor Cavity Reflectance 0.20






Room Cavity Ratio	RC RW	80%			50%			10%		
		50	30	10	50	30	10	50	30	10
1	67	64	61	62	59	57	54	53	52	
2	59	55	52	54	52	49	49	47	45	
3	52	48	44	48	46	42	44	42	40	
4	47	43	38	43	40	36	40	37	35	
5	42	37	33	39	35	31	36	33	30	
6	38	32	29	35	31	28	32	29	27	
7	34	29	25	32	27	24	29	26	23	
8	30	25	22	29	24	21	27	23	20	
9	27	22	19	26	21	18	24	20	18	
10	25	20	17	23	19	16	22	18	16	

SPECIFICATIONS

Housing is die-formed of cold-rolled steel for uniformity and stability. Snap-on type wiring channel cover can be removed without the use of tools. Metal components are phosphate coated and finished in baked white enamel providing a minimum reflectance factor of 85%. Lens is virgin acrylic with prismatic bottom and linear refractive sides which hinge along the entire length on either side of fixture. All units (except 20 watt) are equipped with high power factor Class "P" ETL-CBM ballasts (120 volt 60 Hz is standard). Fixtures are UL-listed and bear union and UL labels.

DIMENSIONS

All KO's are 7/8" dia. unless otherwise specified.

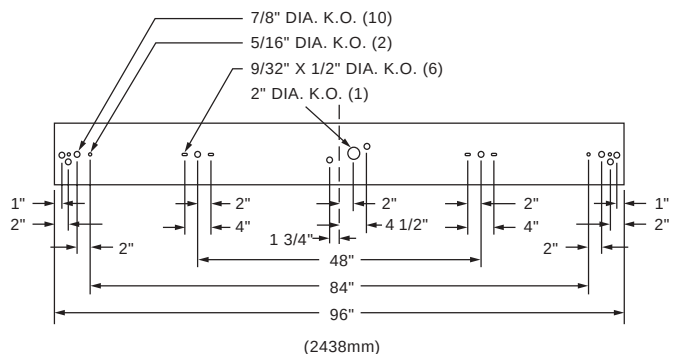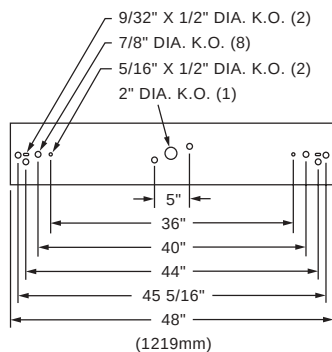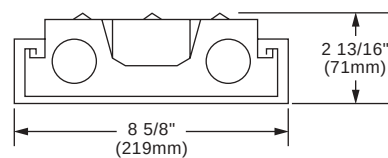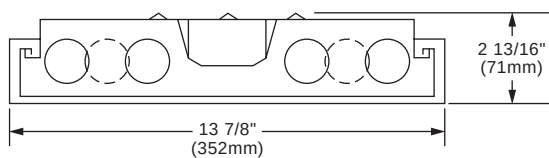

Dimensions and specifications subject to change without notice.